


THE
LIGHTING
BIBLE

 DELTALIGHT®





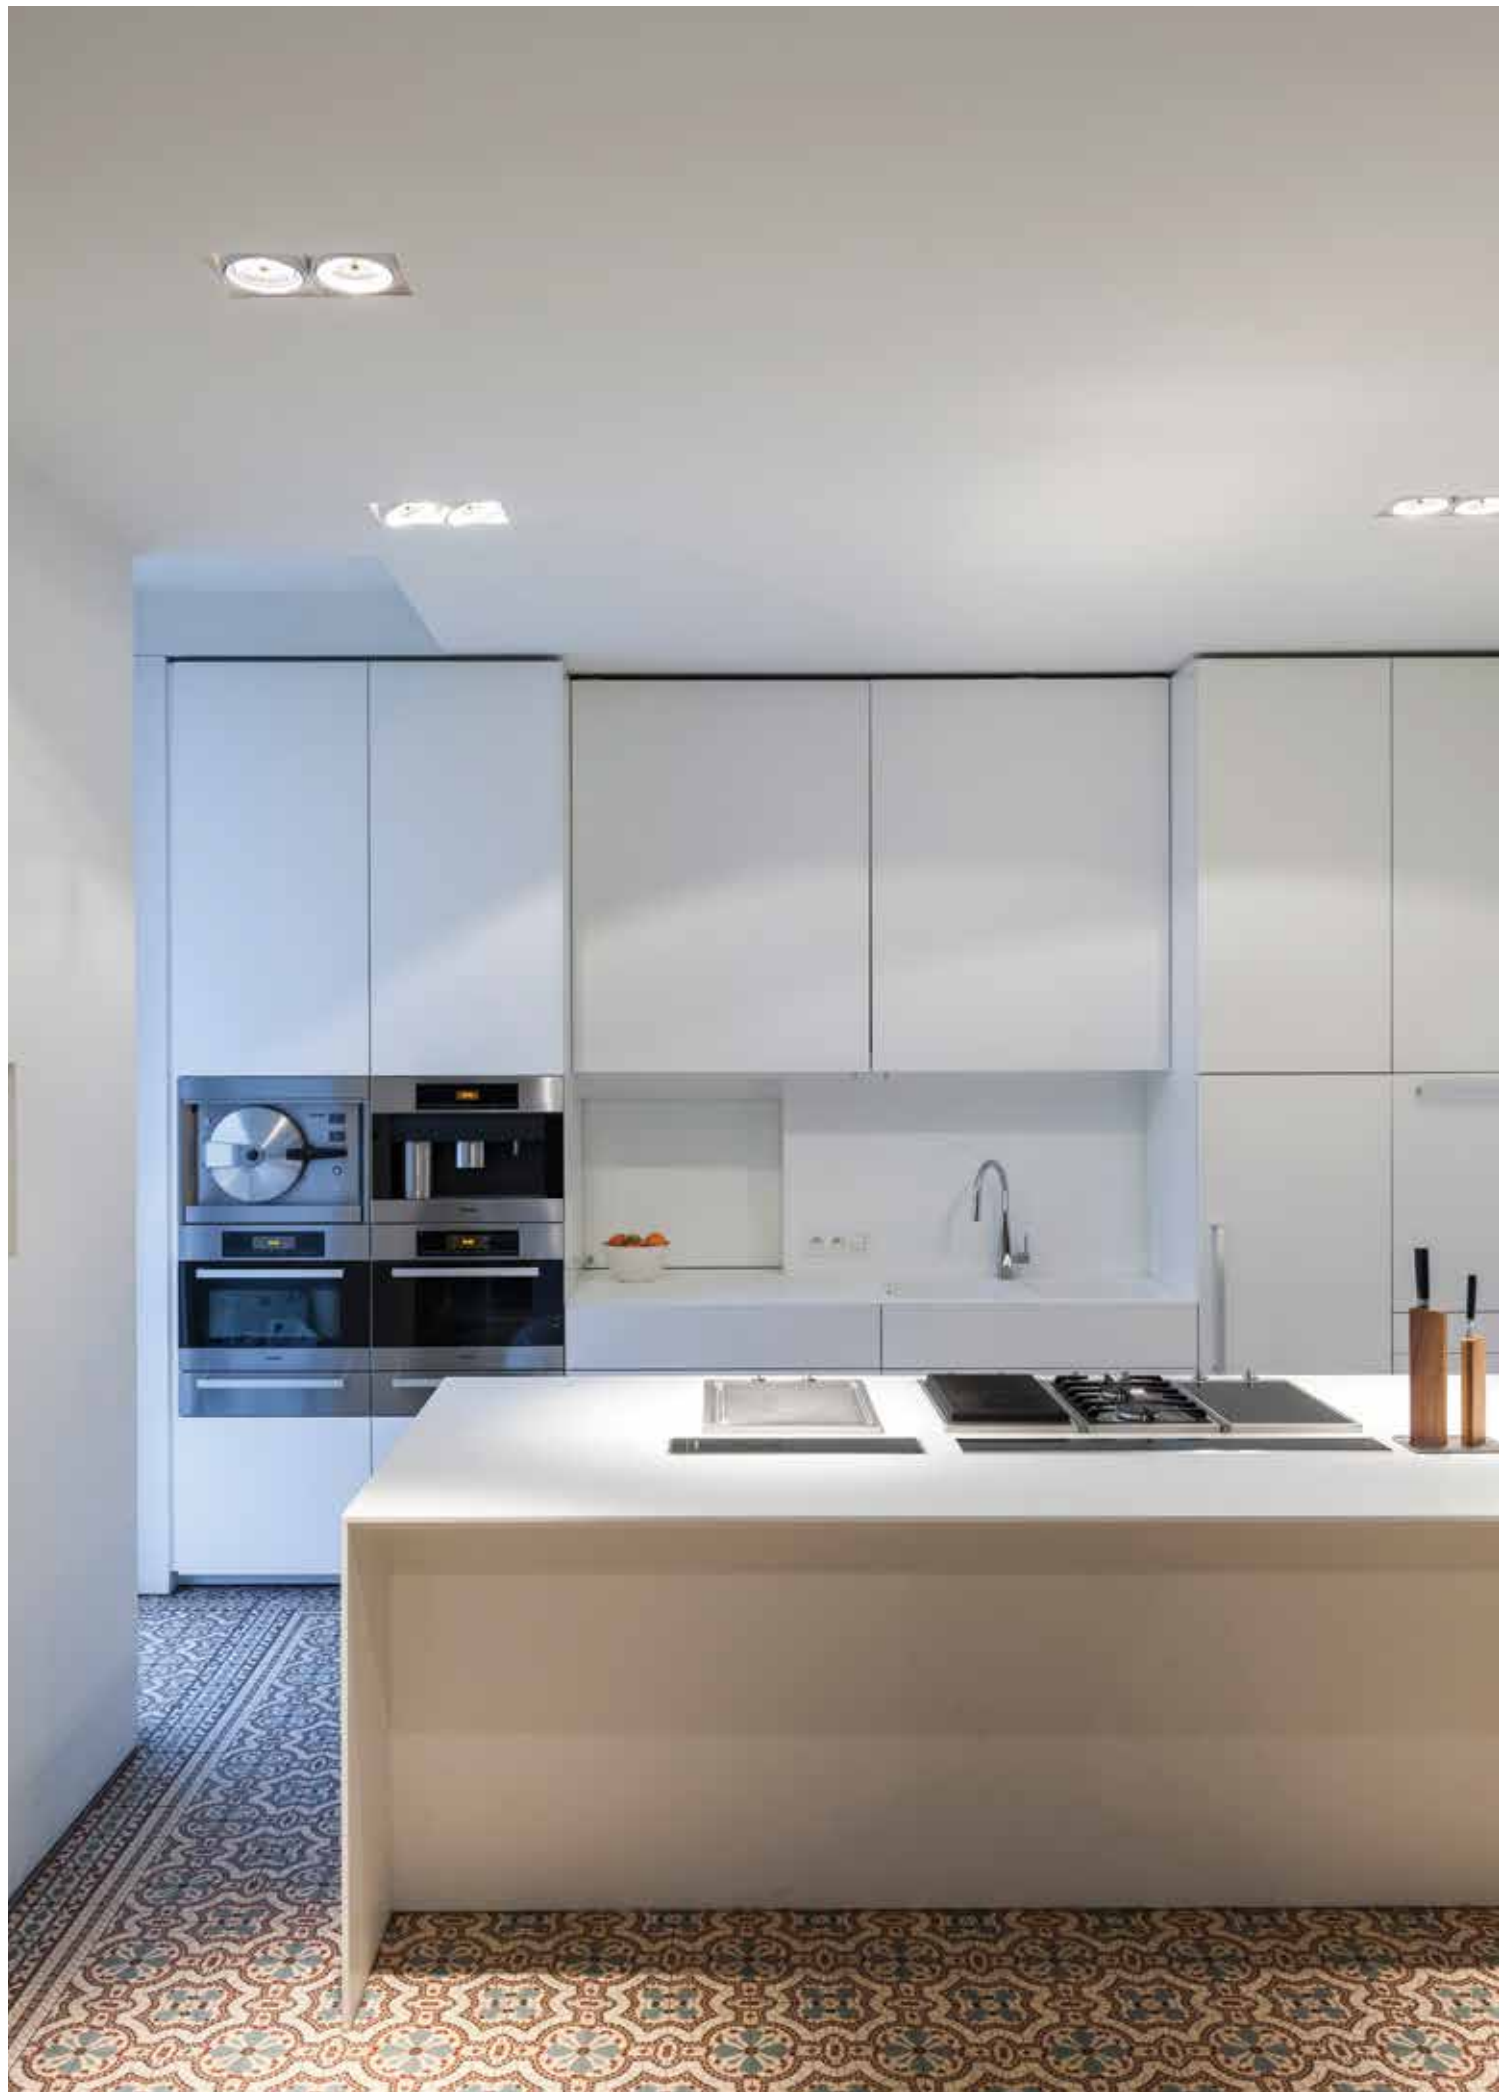



FULL INFO / PAG TEC

Options



INSTALLATION		
GRID IN TRIMLESS 1 MK 202 61 95 01	171 x 171 x 55	173 x 173
GRID IN TRIMLESS 1 MK L 202 61 95 01L	293 x 293 x 55	173 x 173
EXPOSED CONCRETE PACK GIT 1 202 61 96 01	220 x 262 x 210	-
GRID IN TRIMLESS 2 MK 202 61 95 02	171 x 310 x 55	312 x 173
GRID IN TRIMLESS 2 MK L 202 61 95 02L	432 x 293 x 55	312 x 173
EXPOSED CONCRETE PACK GIT 2 202 61 96 02	220 x 401 x 210	-
CONTROL GEAR		
TRANSFO 50W 200 46 06	86 x 31 x 20	
TRANSFO 100W 200 46 10	107 x 35 x 21	
BALLASTSET HID 135 200 45 135	140 x 64 x 32	
BALLASTSET HID 170 200 45 170	186 x 90 x 37	

FULL INFO / PAG TEC

Accessories

CONE 111 ◊ 201 28 00 ◊ ◊ = ALU / B / C / W QR-LP111 max. 24"	Ø117 / Ø80 / H26	
CLIP 111 ◊ 201 27 99 A ◊ ◊ = A / B / W	Ø110 / H22	
FRONTGLASS 111 201 17 00	Ø100	
LENS 111 201 47 11	Ø100	

Grid In Trimless 1

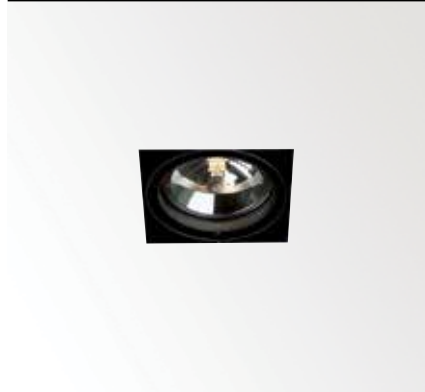


157 x 157 x 120 max.40

GRID IN TRIMLESS 1 QR ◊

202 61 00 01 ◊
◊ = A / B / W
ADJUSTABLE 0° - 30°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
CE 0.7 IP20 1,0

OPTIONS
GRID IN TRIMLESS 1 MOUNTING KIT
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
EXPOSED CONCRETE PACK GIT 1
LED SOLUTION - PAG TEC 4-5
TRANSFO
ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111




157 x 157 x 160 max.40

GRID IN TRIMLESS 1 H111 ◊

202 61 88 01 ◊
◊ = A / B / W
ADJUSTABLE 0° - 30°
GX8.5 / EXCL.EVG
1 x HIR-CE111 max.70W
CE 0.8 IP20 1,0

OPTIONS
GRID IN TRIMLESS 1 MOUNTING KIT
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
EXPOSED CONCRETE PACK GIT 1
BALLASTSET HID

Grid In Trimless 2




296 x 157 x 120 max.40

GRID IN TRIMLESS 2 QR ◊

202 61 00 02 ◊
◊ = A / B / W
ADJUSTABLE 0° - 30°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W
CE 1.2 IP20 1,0

OPTIONS
GRID IN TRIMLESS 2 MOUNTING KIT
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
EXPOSED CONCRETE PACK GIT 2
LED SOLUTION - PAG TEC 4-5
TRANSFO
ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111




296 x 157 x 160 max.40


GRID IN TRIMLESS 2 H111 ◊

202 61 88 02 ◊
◊ = A / B / W
ADJUSTABLE 0° - 30°
GX8.5 / EXCL.EVG
2 x HIR-CE111 max.70W
CE 1.4 IP20 1,0


OPTIONS
GRID IN TRIMLESS 2 MOUNTING KIT
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
EXPOSED CONCRETE PACK GIT 2
BALLASTSET HID

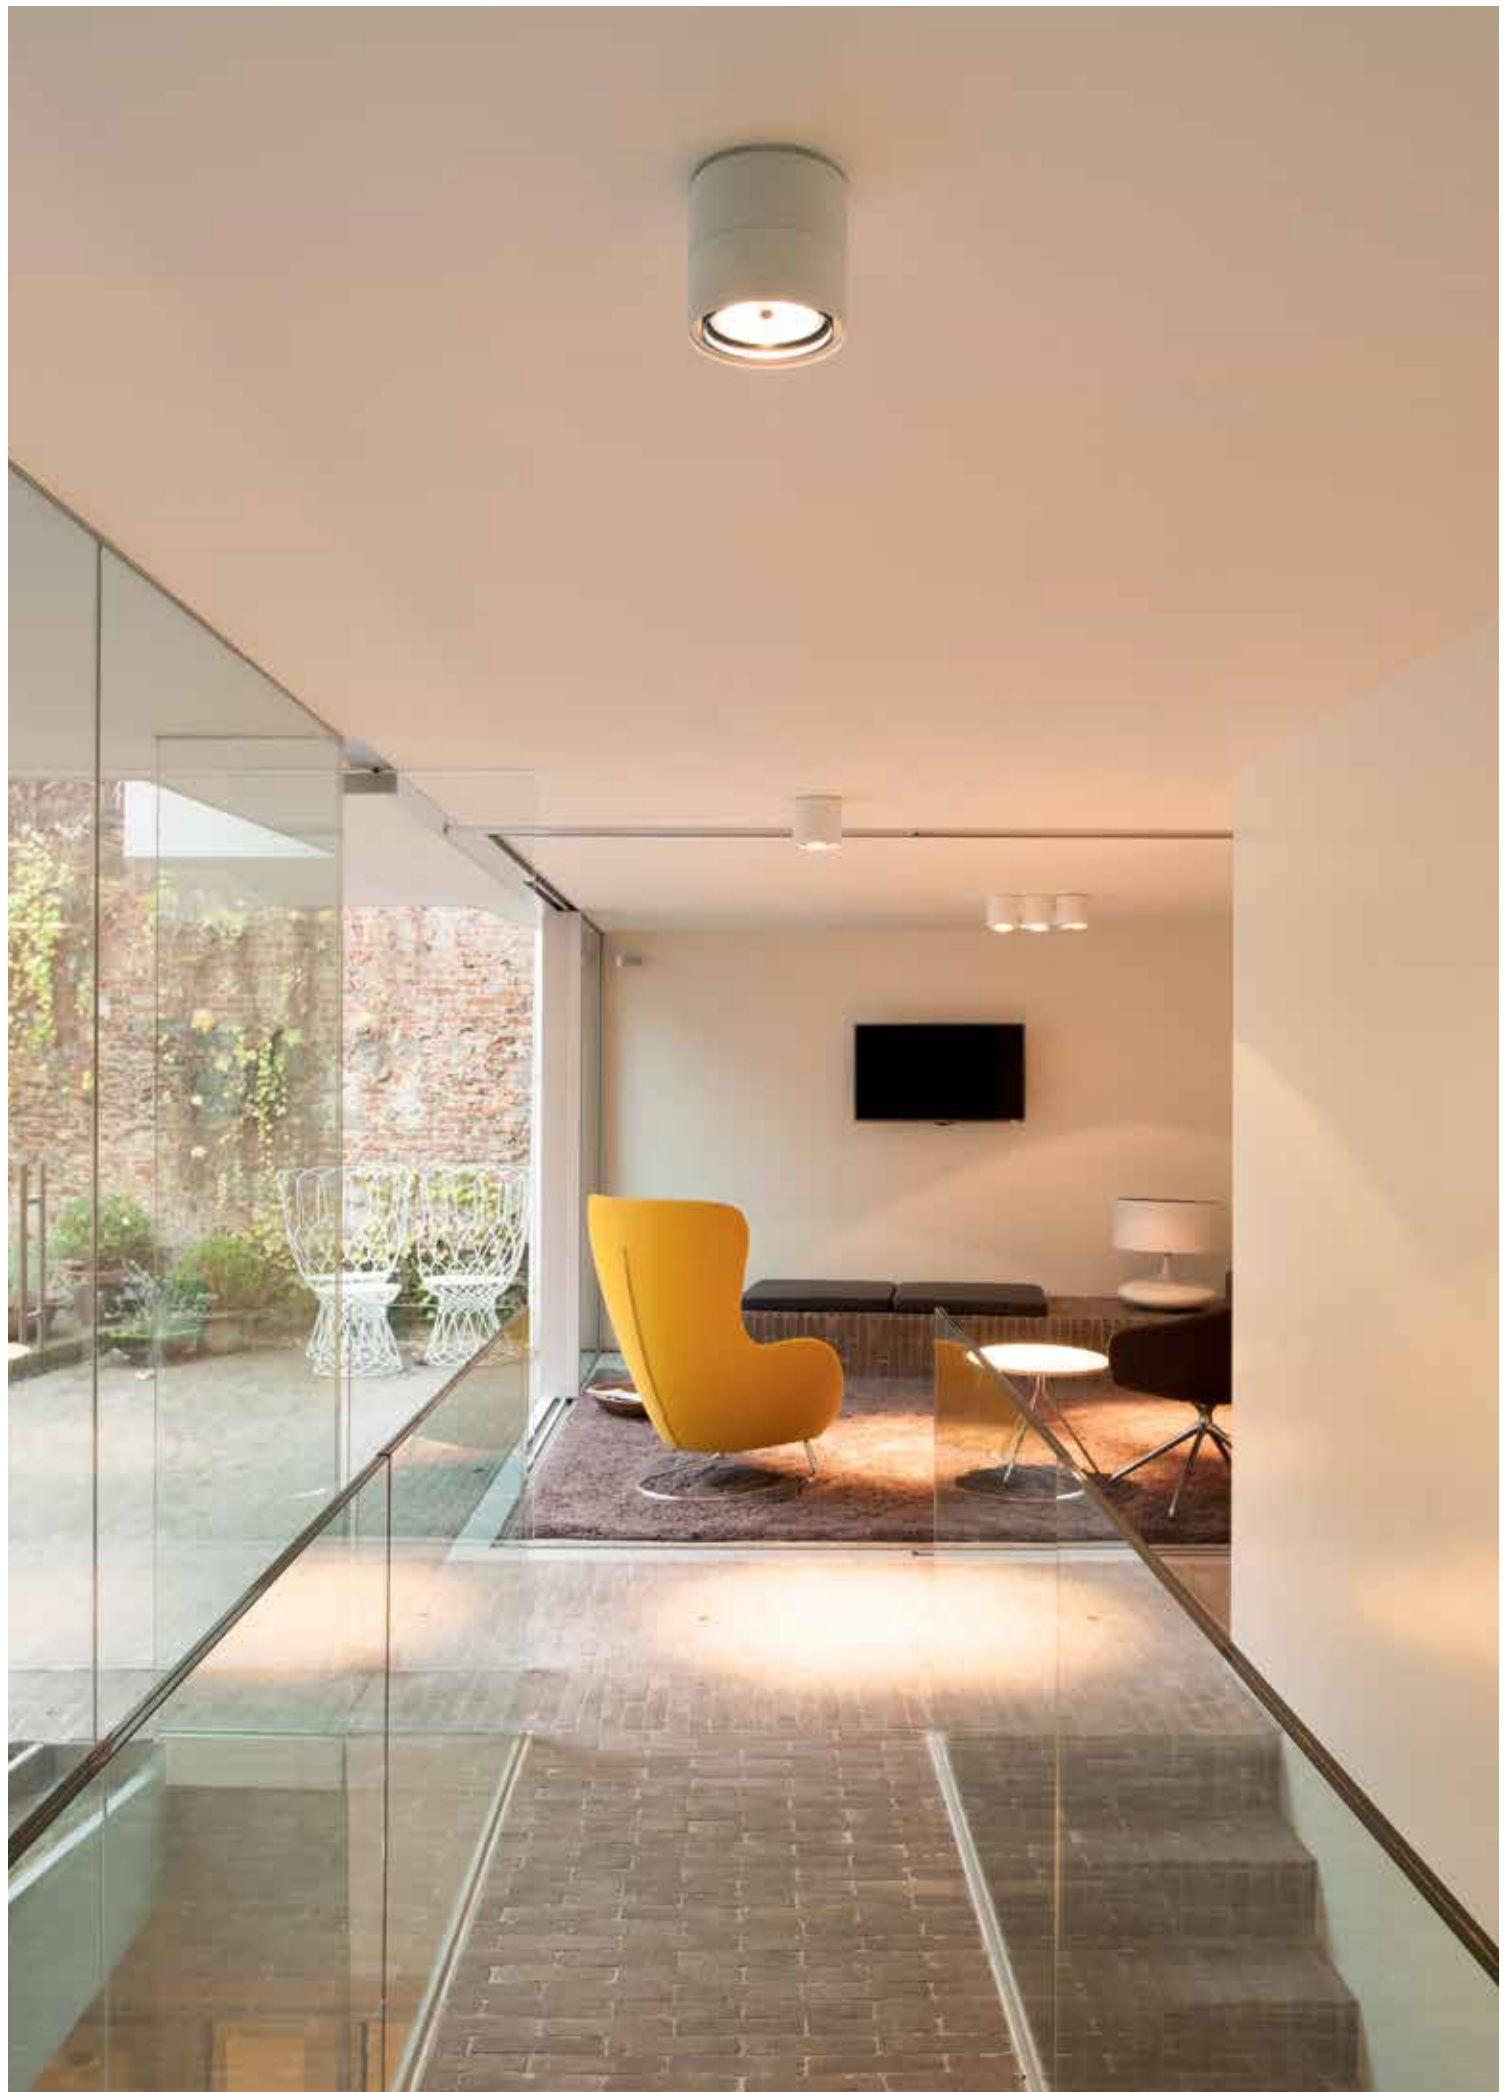

Link 1 Reo



Link 1



	CRI > 80	CRI > 90
4000K	ON REQUEST	
3000K	680lm (7W)	566lm (7W)
REFLECTOR FL-33°	LINK 1 REO 3033 ◊ 315 41 8122 ◊ ◊ = W	LINK 1 REO 3033-9 ◊ 315 41 89122 ◊ ◊ = W
2700K	618lm (7W)	525lm (7W)
REFLECTOR FL-33°	LINK 1 REO 2733 ◊ 315 41 8123 ◊ ◊ = W	LINK 1 REO 2733-9 ◊ 315 41 89123 ◊ ◊ = W

ADJUSTABLE 0° - 30° / 350°
 INCL.1 x POWERLED WHITE 7W
 INCL.LED POWER SUPPLY 350mA-DC
 120-240V / 50-60Hz
 ◊ CE 0,9 IP20

LINK 111 ◊
315 11 00 ◊
 ◊ = W
 ADJUSTABLE 0° - 30° / 350°
 G53 / 220-240V / 50-60Hz / TE
 1 x QR-LP111 max.50W
 ◊ CE 0,7 IP20 1,0

